



• YOUR
• SMART
• ENERGY

STORION-LC-H125

Liquid-Cooling Outdoor Cabinet

CAPACITY

Inverter: 125 kVA

System: 261 kWh



All-in-One Design

Easily Set Function Parameters

Seamless Switching to backup

200% PV input oversizing

Safer Intelligent Fire Protection System

Various Operating Modes Available For Selection

System-wide Temperature Difference within 3°C



Alpha ESS Co., Ltd.

+86 513 8060 6891
info@alpha-ess.com
www.alphaess.com
Jiuhua Road 888, Nantong High-Tech Industrial Development Zone, Nantong, Jiangsu Province, China

Alpha ESS Suzhou Co., Ltd.

+86 512 6828 7609
info@alpha-ess.com
www.alphaess.com
Building 10-A, Canal Town Industrial Park, 99 Taihu E Rd, Wuzhong District, Suzhou, Jiangsu Province, China

Alpha ESS Europe GmbH

+49 610 3459 1601
europe@alpha-ess.de
www.alphaess.de
Paul-Ehrlich-Straße 1a, Langen, Hessen D-63225 Germany

Alpha ESS Australia Pty. Ltd.

+61 402 500 520
Australia@alpha-ess.com
www.alphaess.com
8/15-21 Gibbes Street, Chatswood, NSW 2067 Australia

Alpha ESS Italy S.r.l.

+39 339 462 4288
info@alpha-ess.it
www.alphaess.com
Via Del Molinuzzo 83, 59100 Prato (PC), Italy

Alpha ESS UK Ltd.

+44 145 354 5222
info@alpha-ess.com
www.alphaess.com
Drake house, Long street, Dursley, gl11 4hh UK

Alpha ESS International Pte. Ltd.


+65 6513 1125 / +65 6513 1126
Singapore@alpha-ess.com
2 Corporation Road #01-06A Corporation Place 618494 Singapore

Alpha ESS USA, Inc.

+1 408 368 7828
usa@alpha-ess.com
Unit 5 2180 S Ivanhoe St, Denver, CO 80222 USA

Alpha ESS Korea Co., Ltd.

info@alpha-ess.com
2F, 19-4, Nohyeong 11-gil, Jeju-si, Jeju-do, Republic of Korea

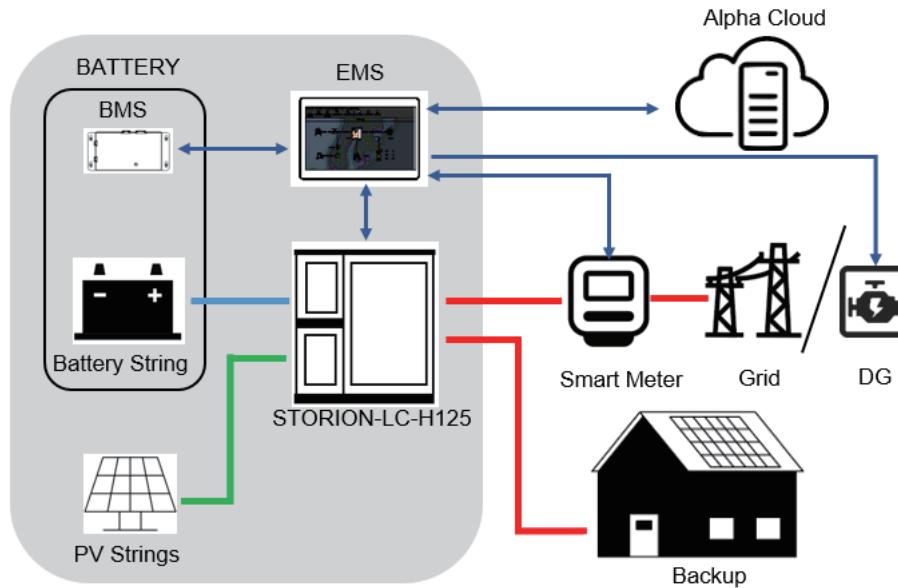

STORION-LC-H125

Model	STORION-LC-H125
System Parameter	
Dimension(W x D x H)	(1050 + 400) x 1500 x 2450 mm*
Battery Modules Connection	5 in series connection
Weight	3.7t
Ingress Protection	IP55
Operation Ambient Temperature Range	-20 °C ~ 50 °C (>45 °C Derating)
Operation Humidity Range	0 - 95 %RH
Max Operation Altitude	3000 m (> 2000 m Derating)
Fire-Fighting System	Aerosol + Sprinkler
Communication protocols	Modbus TCP
PCS Parameters	
Nominal AC Power	125 kVA@45 °C
Max. Output Power	137.5 kVA
Max. PV Power	250 kWp, 16MPPTs (With DCDC Cabinet)
Max. OCV of PV String	700 V
Nominal Grid Voltage	400 V, 3L/N/PE
Nominal Grid Frequency	50/60 Hz (± 5 Hz)
Output THDI/THDU	< 3 %
Max. Efficiency	99%
Switching Time	≤ 20 ms (with STS Cabinet)
Overload Capacity	110% long term, 120% 1 min
Compliance	IEC 62477, IEC 61000, IEC 62109, AS4777.2, EN 50549 VDE 4105,G99
Battery Parameters	
Battery Model	M166314-S
Battery Chemistry	LFP (LiFePO4)
System Battery configuration	1P260S
Operation Voltage Range	702 V ~ 936 V
Nominal Capacity	261.2 kWh
Rated Charging and Discharging Power	130.6kW (0.5 P)
Cycle Life	≥ 8000 @0.5 P 25°C**
Cooling	Liquid Cooling
Compliance	IEC 62619, IEC 62477, IEC 61000, UL9540A

*DCDC cabinet and STS cabinet are separate outdoor cabinets that can be assembled on the side of the system cabinet by stacking installation method.

** Based on laboratory environment.